


3 an.
4m — 2,6
2c 3,9

30TN

ATT 350



Charges, hauteurs et portées Lifting capacities, heights and radius Traglasten / Hubhöhen Cargas, alturas y alcances

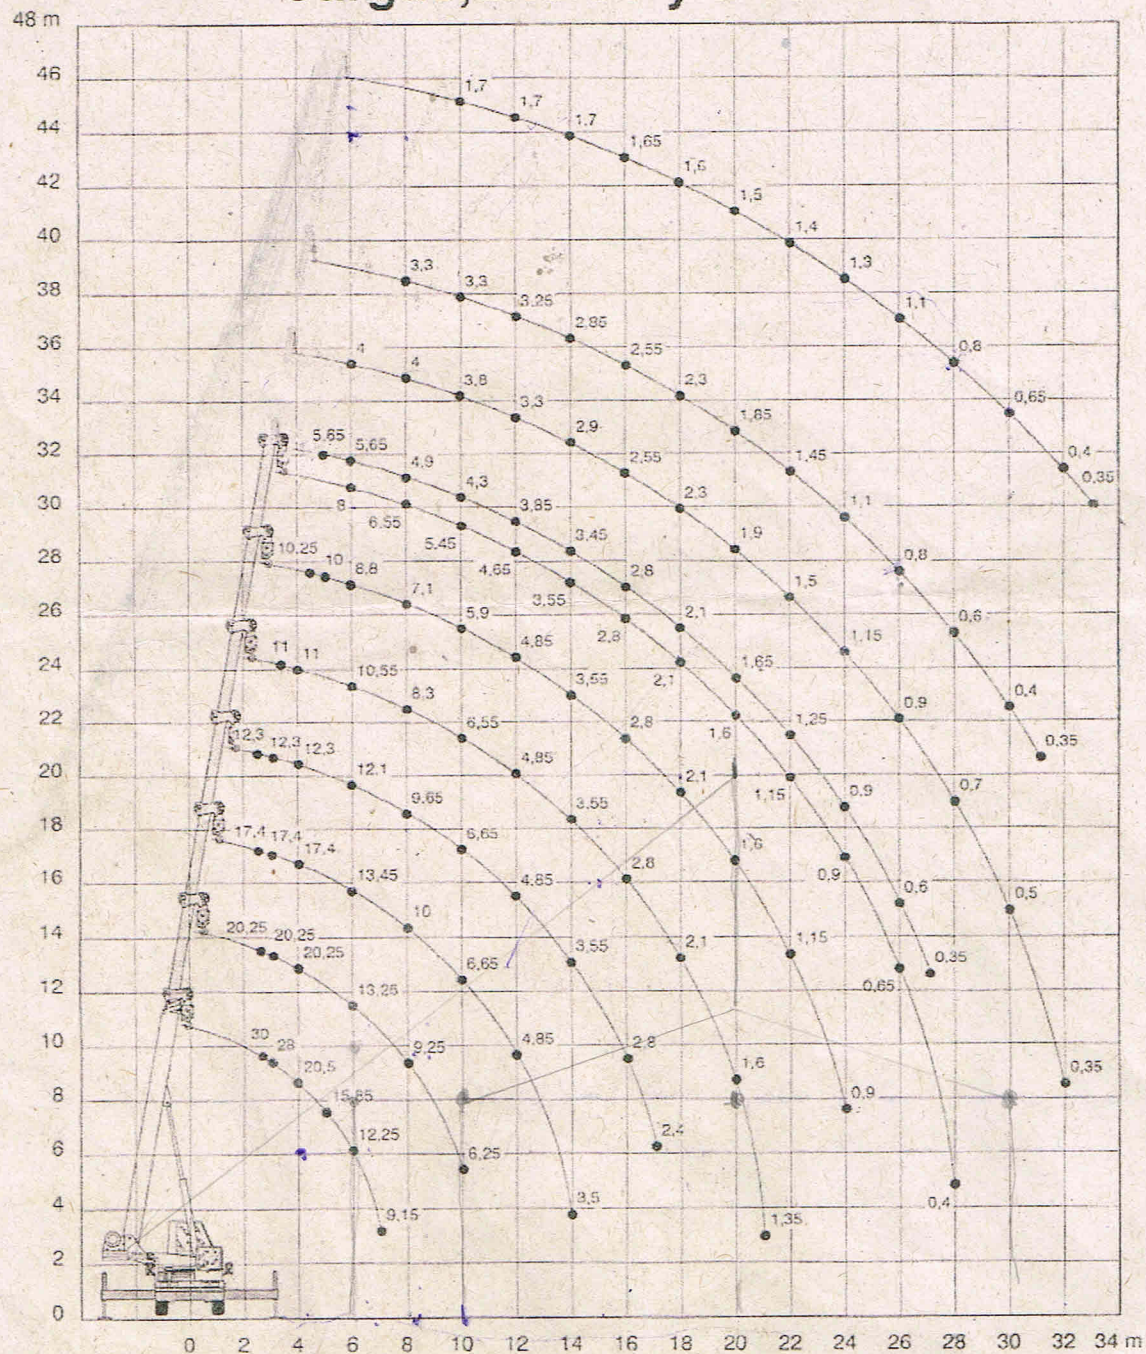

TEREX CRANES



ATT 350



Flèche principale - Main boom Hauptausleger - Pluma principal




FLECHE ENTIEREMENT TELESCOPIQUE DE 9,4 m A 30,4 m - FULLY TELESCOPIC BOOM FROM 9.4 m TO 30.4 m

VOLL HYDRAULISCHER AUSLEGER VON 9,4 m BIS 30,4 m - PLUMA TELESCOPICA DE 9,4 M A 30,4 M



FLECHE ENTIEREMENT TELESCOPIQUE DE 9,4 m A 30,4 m - FULLY TELESCOPIC BOOM FROM 9.4 m TO 30.4 m VOLL HYDRAULISCHER AUSLEGER VON 9,4 m BIS 30,4 m - PLUMA TELESCOPICA DE 9,4 M A 30,4 M								
	9,40 m	12,90 m	16,40 m	19,90 m	23,40 m	26,90 m	30,40 m	
2,70	30,00	20,25	17,40	12,30				2,70
3	28,00	20,25	17,40	12,30				3
3,50	23,70	20,25	17,40	12,30	11,00			3,50
4	20,50	20,25	17,40	12,30	11,00			4
4,50	18,00	18,45	17,40	12,30	11,00	10,25		4,50
5	15,85	16,40	16,65	12,30	11,00	10,00		5
6	12,25	13,25	13,45	12,10	10,55	8,80	8,00	6
7	9,15	11,00	11,15	10,70	9,30	7,80	7,30	7
8		9,25	10,00	9,65	8,30	7,10	6,55	8
9		7,65	8,15	8,15	7,45	6,45	5,95	9
10		6,25	6,65	6,65	6,55	5,90	5,45	10
11			5,60	5,60	5,60	5,50	5,00	11
12			4,85	4,85	4,85	4,85	4,65	12
13			4,10	4,15	4,15	4,15	4,15	13
14			3,50	3,55	3,55	3,55	3,55	14
15				3,15	3,15	3,15	3,15	15
16				2,80	2,80	2,80	2,80	16
17				2,40	2,45	2,45	2,45	17
18					2,10	2,10	2,10	18
19					1,80	1,80	1,80	19
20					1,60	1,60	1,60	20
21					1,35	1,35	1,35	21
22						1,15	1,15	22
23						1,00	1,05	23
24						0,90	0,90	24
25							0,75	25
26							0,65	26
27							0,55	27
28							0,40	28

Contrepoids max. / Max. counterweight / Max. Gegengewicht / Contrapeso máximo : 4,0 T.



360°								
	9,40 m	12,90 m	16,40 m	19,90 m	23,40 m	26,90 m	30,40 m	
3	27,95	20,25	17,40	12,30				3
3,50	23,70	20,25	17,40	12,30	11,00			3,50
4	20,50	20,25	17,40	12,30	11,00			4
4,50	18,00	18,45	17,40	12,30	11,00	10,25		4,50
5	15,85	16,40	16,65	12,30	11,00	10,00		5
6	12,25	12,35	12,20	12,10	10,55	8,80	8,00	6
7	9,05	9,10	9,10	9,00	8,90	7,90	7,30	7
8		7,10	7,05	7,05	6,95	7,10	6,55	8
9		5,45	5,45	5,40	5,35	6,10	5,95	9
10		4,30	4,30	4,25	4,25	5,05	5,10	10
11			3,80	3,75	3,70	4,35	4,35	11
12			3,10	3,10	3,05	3,65	3,65	12
13			2,60	2,55	2,50	3,10	3,10	13
14			2,15	2,15	2,15	2,65	2,65	14
15				1,80	1,75	2,20	2,20	15
16				1,45	1,45	1,85	1,85	16
17				1,15	1,10	1,55	1,55	17
18					0,85	1,35	1,35	18
19					0,65	1,10	1,10	19
20					0,45	1,00	1,00	20
21						0,80	0,80	21
22						0,70	0,70	22
23						0,50	0,55	23
24								24
25								25
26								26
27								27

Contrepoids max. / Max. counterweight / Max. Gegengewicht / Contrapeso máximo : 4,0 T.




ATT 350



Extension 8 m / 15 m - 8 m / 15 m extension Verlängerung 8 m / 15 m - plumin 8 m / 15 m

Stabilisateurs en extension totale - Outriggers fully extended

Abstützungen voll ausgefahren - Estabilizadores extendidos



Extension 8 m / 15 m 8 m / 15 m Extension										
m	23,40 m + 8 m	26,90 m + 8 m	30,40 m + 8 m			30,40 m + 15 m			m	
	0°	0°	0°	15°	30°	0°	15°	30°		
5	5,65								5	
6	5,65	4,00							6	
7	5,20	4,00							7	
8	4,90	4,00	3,30						8	
9	4,60	4,00	3,30						9	
10	4,30	3,80	3,30	3,20		1,70			10	
11	4,05	3,55	3,30	3,00		1,70			11	
12	3,85	3,30	3,25	2,80	2,50	1,70			12	
13	3,65	3,10	3,05	2,65	2,40	1,70			13	
14	3,45	2,90	2,85	2,50	2,30	1,70	1,40		14	
15	3,10	2,70	2,70	2,40	2,20	1,70	1,40		15	
16	2,80	2,55	2,55	2,30	2,10	1,65	1,35		16	
17	2,45	2,40	2,40	2,20	2,05	1,65	1,30	1,10	17	
18	2,10	2,30	2,30	2,10	1,95	1,60	1,25	1,05	18	
19	1,90	2,15	2,10	2,00	1,85	1,55	1,25	1,05	19	
20	1,65	1,90	1,85	1,90	1,80	1,50	1,20	1,05	20	
21	1,45	1,70	1,60	1,80	1,75	1,45	1,20	1,00	21	
22	1,25	1,50	1,45	1,55	1,65	1,40	1,15	1,00	22	
23	1,10	1,35	1,25	1,40	1,45	1,35	1,15	1,00	23	
24	0,90	1,15	1,10	1,20	1,25	1,30	1,10	0,95	24	
25	0,75	1,05	0,95	1,05	1,10	1,25	1,10	0,95	25	
26	0,60	0,90	0,80	0,85	0,95	1,10	1,05	0,95	26	
27	0,50	0,80	0,65	0,75	0,85	0,90	1,05	0,95	27	
28	0,35	0,70	0,60	0,65	0,75	0,80	1,00	0,90	28	
29		0,60	0,45	0,50	0,65	0,70	0,90	0,90	29	
30		0,50	0,40	0,45	0,50	0,65	0,80	0,90	30	
31		0,40	0,35	0,40	0,40	0,50	0,70	0,80	31	
32		0,35			0,35	0,40	0,55	0,65	32	
33						0,35	0,45	0,55	33	
34							0,40	0,45	34	
35							0,35	0,40	35	
36								0,35	36	

Contrepoids max / Max. counterweight / Max. Gegengewicht / Contrapeso máximo : 4,0 T