


2.1.6 Diagrama de alcances

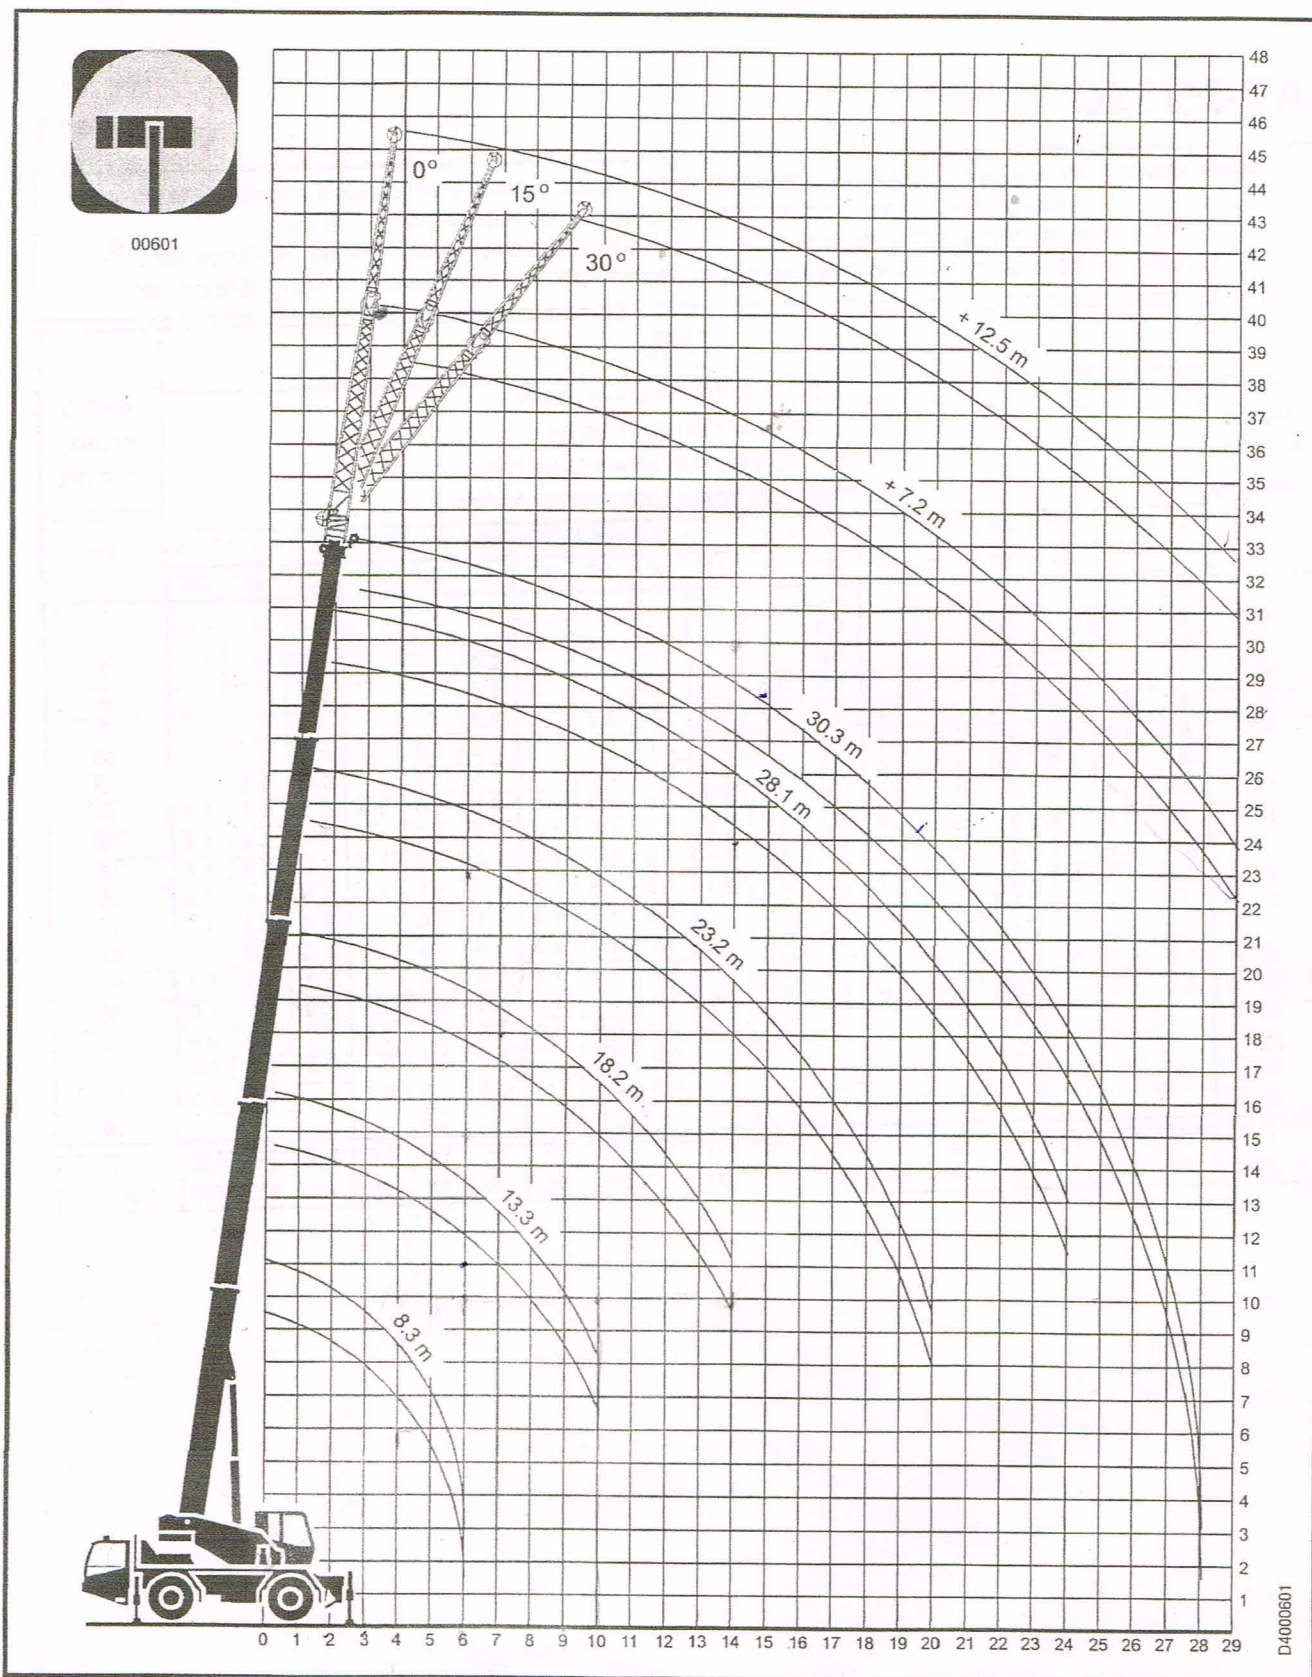

2.1.7.3 Tabla de cargas 3

AT-35/32C Con contrapeso de 4.5 t.

AT-35/32C

(05311)

PLUMA PRINCIPAL+PLUMÍN DE CELOSÍA. GRÚA SOBRE ESTABILIZADORES TOTALMENTE EXTENDIDOS. ZONA DE TRABAJO 360°
MAIN BOOM+LATTICE JIB. CRANE ON FULLY EXTENDED OUTRIGGERS. ROTATION 360°
FLÈCHE PRINCIPALE+FLÈCHETTE TREILLIS. GRUE SUR STABILISATEURS EN EXTENSION TOTALE. ROTATION 360°
TELESKOPUSLEGER+GITTERSPITZE. ARBEITSZUSTAND: ABGESTÜTZT (VOLLE STÜTZBASIS). ARBEITSBEREICH: 360°

RADIO RADIUS PORTÉE AUSLADUNG m	75%																		RADIO RADIUS PORTÉE AUSLADUNG m
	LONGITUD DE PLUMA+PLUMÍN MAIN BOOM+JIB LENGTH LONGUEUR DE FLÈCHE+FLÈCHETTE TELESKOP AUSLEGER- UND SPITZELÄNGEN																		
	24.8 m + 7.2 m			28.1 m + 7.2 m			30.3 m + 7.2 m			24.8 m + 12.5 m			28.1 m + 12.5 m			30.3 m + 12.5 m			
	0°	15°	30°	0°	15°	30°	0°	15°	30°	0°	15°	30°	0°	15°	30°	0°	15°	30°	
5	6.5																		5
6	6.2			5.5			5.1			3.1									6
7	5.9			5.3			5.0			3.0			2.9						7
8	5.6	4.4		5.1	3.8		4.9	3.8		2.9			2.8			2.7			8
9	5.3	4.2	3.0	5.0	3.7	2.9	4.7	3.7	2.9	2.8	2.2		2.7			2.6			9
10	5.0	4.0	3.0	4.8	3.6	2.9	4.6	3.6	2.9	2.7	2.1		2.6	2.0		2.5			10
12	4.6	3.7	2.9	4.5	3.5	2.8	4.3	3.5	2.8	2.5	2.0	1.6	2.4	1.9		2.3	1.8		12
14	4.2	3.4	2.9	4.1	3.3	2.8	3.9	3.3	2.8	2.3	1.9	1.6	2.2	1.8	1.4	2.1	1.7	1.4	14
16	3.6	3.1	2.8	3.5	3.0	2.8	3.4	3.0	2.7	2.1	1.8	1.5	2.1	1.7	1.4	2.0	1.6	1.4	16
18	2.9	2.7	2.6	2.8	2.6	2.5	2.7	2.5	2.4	1.9	1.7	1.5	1.9	1.6	1.3	1.8	1.5	1.3	18
20	2.2	2.3	2.3	2.1	2.2	2.2	2.0	2.1	2.1	1.8	1.6	1.4	1.7	1.5	1.3	1.6	1.4	1.3	20
22	1.7	1.8	1.9	1.6	1.7	1.8	1.5	1.6	1.7	1.6	1.5	1.4	1.5	1.4	1.2	1.4	1.3	1.2	22
24	1.3	1.4	1.5	1.3	1.4	1.5	1.2	1.3	1.4	1.5	1.4	1.3	1.4	1.3	1.2	1.3	1.2	1.2	24
26	1.0	1.1	1.2	1.0	1.1	1.2	0.9	1.0	1.1	1.2	1.3	1.3	1.2	1.2	1.1	1.1	1.1	1.1	26
28	0.8	0.9		0.8	0.9	1.0	0.7	0.8	0.9	1.0	1.1	1.1	1.0	1.1	1.1	0.9	1.0	1.0	28
30				0.6	0.7		0.5	0.6	0.7	0.8	0.9	0.9	0.8	0.9	0.9	0.7	0.8	0.8	30
32				0.5				0.5		0.6	0.7		0.6	0.7	0.7	0.5	0.6	0.6	32
34										0.5	0.6		0.5	0.6	0.6		0.5	0.5	34
36														0.5					36
I	75	75	75	90	90	90	100	100	100	75	75	75	90	90	90	100	100	100	I
II-III-IV	75	75	75	90	90	90	100	100	100	75	75	75	90	90	90	100	100	100	II-III-IV



2.1.7 Tablas de cargas

2.1.7.1 Tabla de cargas 1

AT-35/32C Con contrapeso de 4.5 t.

AT-35/32C

(02313)

PLUMA PRINCIPAL. GRÚA SOBRE ESTABILIZADORES TOTALMENTE EXTENDIDOS. ZONA DE TRABAJO 360°
MAIN BOOM. CRANE ON FULLY EXTENDED OUTRIGGERS. ROTATION 360°
FLÈCHE PRINCIPALE. GRUE SUR STABILISATEURS EN EXTENSION TOTALE. ROTATION 360°
TELESKOP AUSLEGER. ARBEITSZUSTAND: ABGESTÜTZT (VOLLE STÜTZBASIS). ARBEITSBEREICH: 360°

RADIO RADIUS PORTÉE AUSLADUNG	75%									RADIO RADIUS PORTÉE AUSLADUNG	
	LONGITUD DE PLUMA BOOM LENGTH LONGUEUR DE FLÈCHE TELESKOP AUSLEGERLÄNGEN										
	m	8.3 m	13.3 m		18.2 m		23.2 m		28.1 m		30.3 m
3	35.0* / 30.0	23.0	20.6							3	
4	25.4* / 23.5	22.8	20.6	17.3	16.3	13.5	12.8			4	
5	19.8	21.0	20.6	17.3	16.0	13.5	12.8	9.1	8.2	5	
6	15.0	17.0	17.0	16.0	14.5	13.3	12.3	9.1	8.2	6	
7		12.5	13.5	13.0	12.7	12.2	10.7	9.1	8.2	7	
8		9.6	10.7	10.6	10.6	10.2	9.5	8.8	7.8	8	
9		7.5	8.7	8.1	9.0	8.8	8.5	8.1	7.5	9	
10		6.1	7.3	6.7	7.7	7.5	7.5	7.3	7.1	10	
12				4.8	5.7	5.2	5.7	5.5	5.5	12	
14				3.5	4.2	3.8	4.4	4.2	4.2	14	
16						2.8	3.4	3.1	3.1	16	
18						2.0	2.7	2.3	2.3	18	
20						1.5	2.2	1.8	1.8	20	
22								1.4	1.4	22	
24								1.0	1.0	24	
26									0.7	26	
28									0.5	28	
I	0	90	0	90	0	90	0	90	100	I	
II-III-IV	0	0	30	30	60	60	90	90	100	II-III-IV	

* Por detrás +/-10°

2.1.5 Dimensiones

